

HANNORLUX®
——汉宁照明——

Add: 13F, YINGSHENG MANSION, NO. 456 TAIAN ROAD, YINZHOU, NINGBO, CHINA.
Tel: +86-574-88377089/88377095 Cell: 0086-18667858988
www.hannorlux.com E-mail: fiona@hannorlux.com



HANNORLUX®
——汉宁照明——



ITEM NO.A60/A65


LED LAMP | BULB A60/A65

-Ideal for general lighting in place of lamps incandescent, obtaining great energy savings.

Watt	7W	9W	12W	15W
Tension	110 - 240V	110 - 240V	110 - 240V	110 - 240V
Frequency	50/60 HZ	50/60 HZ	50/60 HZ	50/60 HZ
Power Factor	>0.5	>0.5	>0.5	>0.5
Useful Life (L70)	25.000h	25.000h	25.000h	25.000h
Luminous Flow	630lm	810lm	1080lm	1350lm
Opening angle	200°	200°	200°	200°
Temp. by Color	2700-6400K	2700-6400K	2700-6400K	2700-6400K
Irc	>80	>80	>80	>80
Efficiency light	90lm W	90lm W	90lm W	90lm W
Dimensions	Ø 60 x 110mm	Ø 60 x 110mm	Ø 60 x 110mm	Ø 60 x 110mm



20W: 130mm
30W: 159mm
40W: 179mm
50W: 203mm



20W: 80mm
30W: 100mm
40W: 120mm
50W: 140mm

LED LAMP | SUPER T BULB

With high power and high lighting capacity, Lampadas LED Super Bulb replace fluorescent, providing 85% energy savings.

ITEM NO.	BT-20W	BT-30W	BT-40W	BT-50W
WATTAGE	20W	30W	40W	50W
Tension	100 - 240V	100 - 240V	100 - 240V	100 - 240V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Power Factor	>0,92	>0,92	>0,92	>0,92
Useful Life (L70)	25.000h	25.000h	25.000h	25.000h
Luminous Flow	1507lm	2400lm	3200lm	4000lm
Opening angle	180°	180°	180°	180°
Temp. by Color	6.500k	6500k	6.500k	6500k
Irc	>80 (R9>0)	>80 (R9>0)	>80 (R9>0)	>80 (R9>0)
Efficiency light	80lm/W	80lm/W	80lm/W	80lm/W
Dimensions	Ø80x130mm	Ø100x159mm	Ø120x179mm	Ø140x203mm

ITEM NO. HN-FB260/FB390/FB520



HN-FB260

HN-FB390

HN-FB520

HN-FB260/HN-FB390/HN-FB520

- 2700K-6500K
- AC100-240V 50/60Hz
- CRI>70/80
- PF>0.5/0.9
- 15000h



Watt	26W	39W	52W
Item.No	HN-FB260	HN-FB390	HN-FB520
Housing	PC	PC	PC
LM	2600lm	3900lm	5200lm
Ø mm	76mm	80mm	90mm
L mm	234mm	234mm	234mm
Colour box/mm	78x54x245mm	82x80x245mm	92x90x245mm
Master box/pcs	57x41x26.5cm/50pcs	43.5x43x26.5cm/25pcs	48.5x48x26.5cm/25pcs

HN-FB300/HN-FB400/HN-FB500

- 2700K-6500K
- AC100-240V 50/60Hz
- CRI≥80
- PF≥0.5
- 15000h

ITEM NO.HN-FB300/FB400/FB500



HN-FB300



HN-FB400



HN-FB500



Item.No	HN-FB300	HN-FB400	HN-FB500
Watt	24W	36W	42W
Material	ABS+PS	ABS+PS	ABS+PS
Voltage	100-240V	100-240V	100-240V
Lumen	2400lm±10%	3600lm±10%	4200lm±10%
LEDS	2835	2835	2835
PF	≥0.5	≥0.5	≥0.5
CRI	≥80	≥80	≥80
CCT	3000k/4000k/6500k	3000k/4000k/6500k	3000k/4000k/6500k
IP	IP20	IP20	IP20
Warranty	2 years	2 years	2 years
Product Size	H:235mm	H:245mm	H:205mm



ITEM NO. LPN19-AR





ITEM NO. LPN19-AS



ITEM NO. LPN19-MR




ITEM NO. LPN19-MS

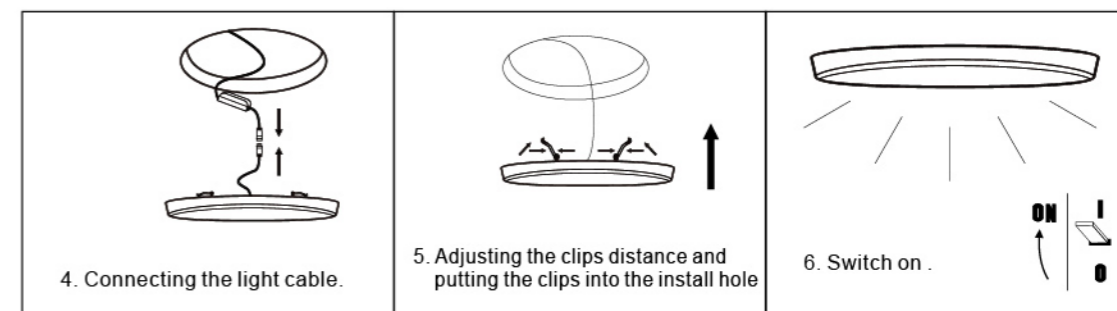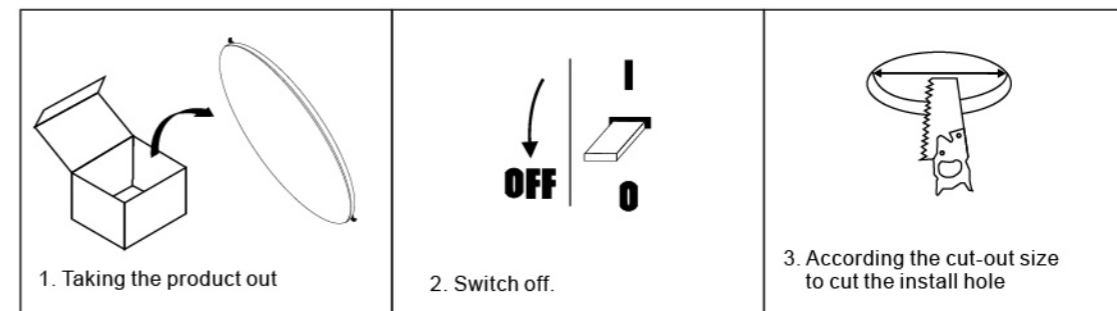

watt	LPN19-AR LPN19-AS (85-265V)				LPN19-MR LPN19-MS (85-265V)		
	10W	18W	24W	32W	18W	24W	32W
Material	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
CCT	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Lumen	900lm	1600lm	2300lm	3600lm	1600lm	2200lm	3300lm
PF	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Size	Ø100*22mm	Ø118*22mm	Ø168*22mm	Ø222*22mm	Ø118*45mm	Ø168*45mm	Ø222*45mm
Cut-out	50-75mm	50-100mm	50-145mm	50-200mm	/	/	/
Warranty	2 years	2 years	2 years	2 years	2 years	2 years	2 years

LED PANEL | ROUND & SQUARE

The Embutir Luminaires are complete, ready to be installed in lining, providing general lighting. Available in various powers.

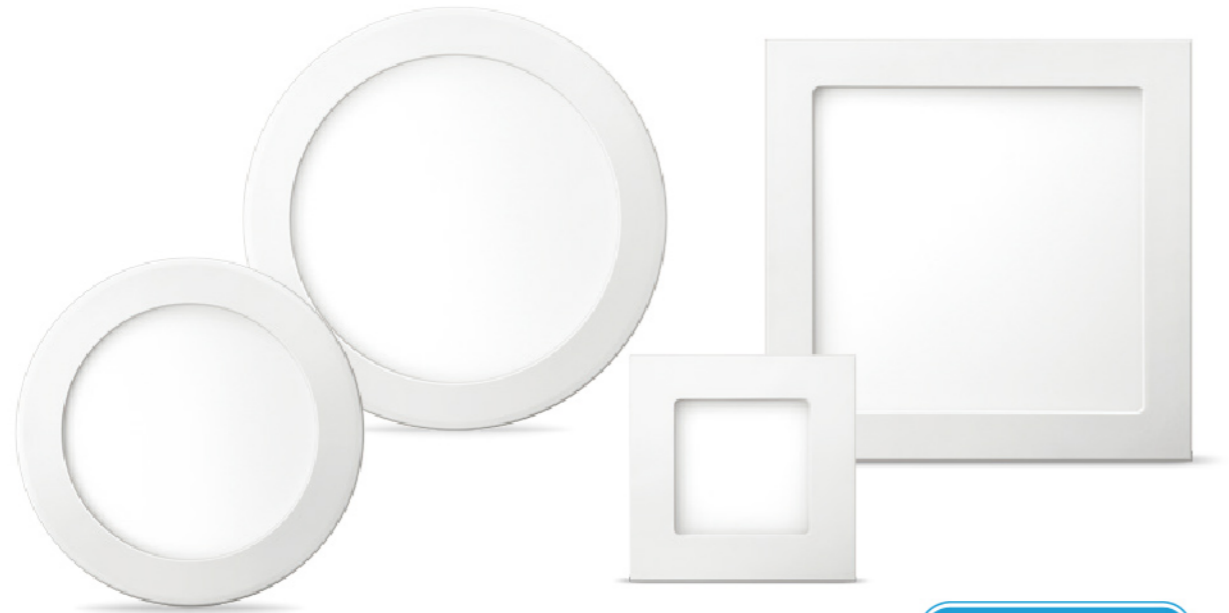

6W: Ø 105mm
12W: Ø 155mm
Nicho: 18W: Ø 205mm
24W: Ø 280mm



6W: Ø 120mm
12W: Ø 172mm
18W: Ø 225mm
24W: Ø 300mm



6W: 20mm
12W: 22,5mm
18W: 23,3mm
24W: 26mm

ITEM NO.LPN-RT




Item No.LPN-RT	LPN-RT06W	LPN-RT12W	LPN-RT18W	LPN-RT24W
Voltage	100 - 240V	100 - 240V	100 - 240V	100 - 240V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Life	25.000 h	25.000 h	25.000 h	25.000 h
Luminous Flow	320 lm (±10%)	620 lm (±10%)	1100 lm (±10%)	1430 lm (±10%)
Irc	>70	>70	>70	>70
luminous efficiency	53 lm/W	52 lm/W	61 lm/W	60 lm/W
IP	20	20	20	20
Dimensions	120 x 120 x 20mm	172 x 172 x 22,5mm	225 x 225 x 23,3mm	300 x 300 x 26mm
Niche	105 x 105mm	155 x 155mm	205 x 205mm	280 x 280mm
Equivalence	1 x Halogen 40W	1 x FC 20W	2 x FC 20W	2 x FC 23W

ITEM NO. HN-THD90




Detachable structure

UN-Detachable structure

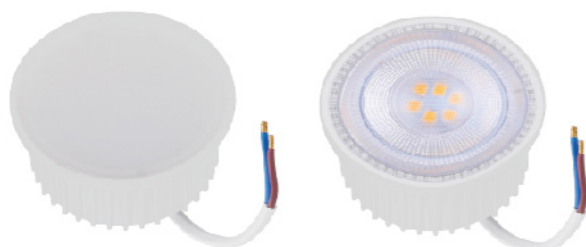



HN-MK50

HN-MK50

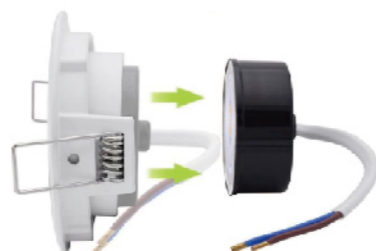

HN-THD90/HN-MK50

- 2700K-6500K
- AC100-240V 50/60Hz
- CRI>70/80
- PF>0.5/0.9
- 15000h

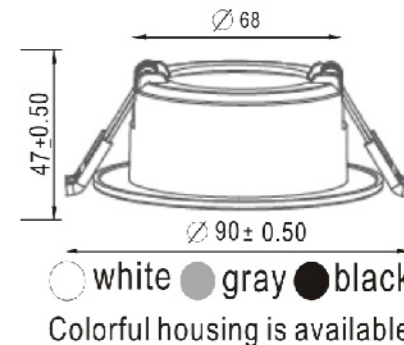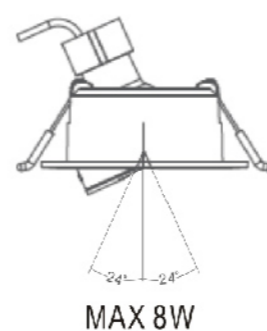

Watt	7W	7W	5W	5W
Item.No	HN-THD90	HN-THD90	HN-MK50	HN-MK50
Housing	PC	PC	PA+ALU	PA+ALU
LM	600lm	600lm	400lm	400lm
Ø mm	68mm	68mm	50mm	50mm
L mm	47mm	47mm	22mm	22mm
Colour box/mm	70x70x55mm	70x70x55mm	52X52X38mm	52X52X38mm
Master box/pcs	37.5x37x24.5cm/100pcs	37.5x37x24.5cm/100pcs	54.5X28X18cm/200pcs	54.5X28X18cm/200pcs

LED Ceiling Light | 3000K/4000K/6000K Adjustable by Switch

The Luminaires are color temperature adjusted by switch in side. Available in various powers.



Item No.LC	LC218	LC224	LC232
Watts	18W	24W	32W
Voltage	220 - 240V	220 - 240V	220 - 240V
Frequency	50Hz	50Hz	50Hz
Life	25.000 h	25.000 h	25.000 h
Luminous Flow	1170 lm	1560 lm	2080 lm
CRI	>80	>80	>80
PF	0.5	0.5	0.5
IP	20	20	20
Dimensions	330X330X100mm	330X330X100mm	330X330X100mm
Materiale	ACCIAIO+PMMA	ACCIAIO+PMMA	ACCIAIO+PMMA

ITEM NO.HN-FL006



HN-FL006 Series LED Flood Light, PASS CE (EU) ERP 2019/2020)

Suitable for external use such as gardens, facades, supervisory, supervisory and security accesses. The high-powered LED, in conjunction with its reflector, reach well and light range.

Watt	10W	20W	30W	50W	100W	150W	200W
Voltage	127V/220V	127V/220V	127V/220V	127V/220V	127V/220V	127V/220V	127V/220V
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Life	25.000h	25.000h	25.000h	25.000h	25.000h	25.000h	25.000h
Lumen	850lm	1700lm	2550lm	4250lm	8500lm	12750lm	17000lm
Driver	IC	IC	IC	IC	IC	IC	IC
CCT	2700-6400K	2700-6400K	2700-6400K	2700-6400K	2700-6400K	2700-6400K	2700-6400K
CRI	>80	>80	>80	>80	>80	>80	>80
PF	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
Material	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass	Aluminum+Glass
Dimensions (P x L x A)	109x99x33 mm	128x113x32 mm	169x145x34 mm	239x199x42 mm	268x238x44 mm	309x274x52 mm	344x308x56 mm

ITEM NO. HN-SL01



LED Street light-HN-SL01

Surge 4KV, exposed line 15CM,3X1 rubber line

Model	HN-SL01-50WB	HN-SL01-100WB	HN-SL01-150WB	HN-SL01-200WB
Material	AL+PC	AL+PC	AL+PC	AL+PC
Voltage	100-240V	100-240V	100-240V	100-240V
LED	SMD2835	SMD2835	SMD2835	SMD2835
CRI	>80	>80	>80	>80
CCT(K)	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Dimension(mm)	410*155*60	520*190*85	550*210*85	610*240*85
PF	0.9	0.9	0.9	0.9
LUMENS(lm)	100lm/w	100lm/w	100lm/w	100lm/w
Lifetime	25000hrs	25000hrs	25000hrs	25000hrs
Beam Angle	90°	90°	90°	90°
IP	IP65	IP65	IP65	IP65



front

back



HN-SL02-200WB

HN-SL02-150WB

HN-SL02-100WB

HN-SL02-50WB

LED Street light-HN-SL02

Surge 4KV, Power line 3*1.0²/≥15CM

Model	HN-SL02-50WB	HN-SL02-100WB	HN-SL02-150WB	HN-SL02-200WB
Material	AL+PC	AL+PC	AL+PC	AL+PC
Voltage	100-240V	100-240V	100-240V	100-240V
LEDS	3030/1W/50PCS	3030/1W/100PCS	3030/1W/150PCS	3030/1W/240PCS
CRI	>80	>80	>80	>80
CCT(K)	2700-6500K	2700-6500K	2700-6500K	2700-6500K
Dimension(mm)	398*139*50mm	525*183*50mm	620*188*50mm	650*200*50mm
PF	>0.9	>0.9	>0.9	>0.9
LUMENS(lm)	100lm/w	100lm/w	100lm/w	100lm/w
Open size	Ø60mm	Ø60mm	Ø60mm	Ø60mm
Viewing Angle	70°*140°	70°*140°	70°*140°	70°*140°
IP	IP65	IP65	IP65	IP65

ITEM NO. HN-SL03



back



front



LED Street light-HN-SL03

Surge 4KV, Power line 3*1.0²/≥15CM

Model	HN-SL03-50WB	HN-SL03-100WB	HN-SL03-150WB	HN-SL03-200WB
Material	ALU+PC	ALU+PC	ALU+PC	ALU+PC
Voltage	100-240V	100-240V	100-240V	100-240V
Wattage	50W±10%	100W±10%	150W±10%	200W±10%
Lumen	5000lm±10%	10000lm±10%	15000lm±10%	20000lm±10%
LEDS	SMD3030	SMD3030	SMD3030	SMD3030
PF	>0.9	>0.9	>0.9	>0.9
CRI	≥80	≥80	≥80	≥80
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
IP Grade	IP65	IP65	IP65	IP65
Product size	420*160*58mm	490*190*73mm	580*200*73mm	698*292*76.4mm

ITEM NO. HN-SL04



side

back

50W

100W

150W

LED Street light-HN-SL04

Surge 4KV, Power line $3 \times 1.0^2 / \geq 15\text{CM}$

Model	HN-SL04-50WB	HN-SL04-100WB	HN-SL04-150WB	HN-SL04-200WB
Material	ALU+PC	ALU+PC	ALU+PC	ALU+PC
Voltage	100-240V	100-240V	100-240V	100-240V
Wattage	50W±10%	100W±10%	150W±10%	200W±10%
Lumen	5000lm±10%	10000lm±10%	15000lm±10%	20000lm±10%
LEDS	SMD2835	SMD2835	SMD2835	SMD2835
PF	>0.9	>0.9	>0.9	>0.9
CRI	≥80	≥80	≥80	≥80
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
IP Grade	IP65	IP65	IP65	IP65
Product size	410*120*55mm	475*140*65mm	585*160*75mm	685*175*75mm

ITEM NO. HN-SL05



LED Street light-HN-SL05

Surge 2KV, Power line $3 \times 1.0^2 / \geq 15\text{CM}$

Model	HN-SL05-50WB	HN-SL05-100WB	HN-SL05-150WB	HN-SL05-200WB
Material	ALU+PC	ALU+PC	ALU+PC	ALU+PC
Voltage	100-240V	100-240V	100-240V	100-240V
Wattage	50W±10%	100W±10%	150W±10%	200W±10%
Lumen	6000lm±10%	12000lm±10%	18000lm±10%	24000lm±10%
LEDS	SMD2835	SMD2835	SMD2835	SMD2835
PF	>0.9	>0.9	>0.9	>0.9
CRI	≥80	≥80	≥80	≥80
CCT	2700-6500K	2700-6500K	2700-6500K	2700-6500K
IP Grade	IP65	IP65	IP65	IP65
Product size	408*138*23mm	460*151*23mm	537*183*23mm	650*211*24mm


ITEM NO.HR-HB002-UFO



HR-HB002-UFO-100W



HR-HB002-UFO-150W

HR-HB002-UFO-200W

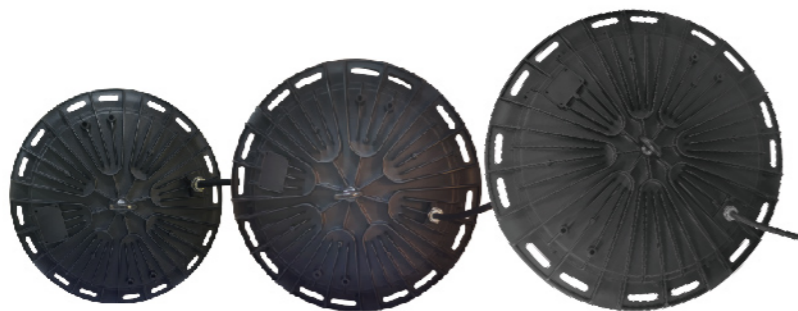

-Product Description

- Product color :Sand Black
- Material:Aluminium body & PC optical lens(90°C)
- 2835SMD LED
- 4KV surging protection
- Protection Rating:IP65(Waterproof)
- Operation in outside temperature:-20 to + 45°C

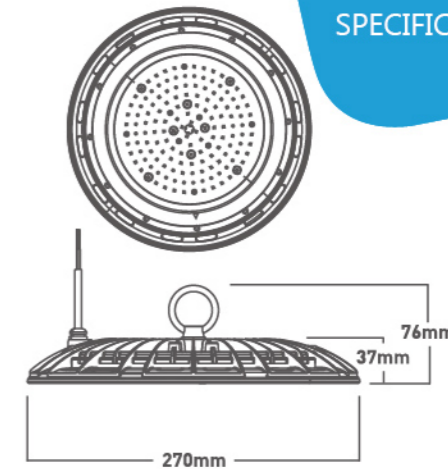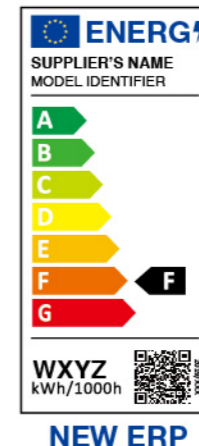

SPECIFICATION

Watt	HR-HB002-UFO-100W	HR-HB002-UFO-150W	HR-HB002-UFO-200W
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC
Voltage	100-240V	100-240V	100-240V
LED	SMD2835	SMD2835	SMD2835
PF	>0.9	>0.9	>0.9
RA	80	80	80
Lumen	100lm/W	100lm/W	100lm/W
CCT	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
Size	27.1x27.1x9cm	31.1x31.1x9cm	38x38x9cm
IP LEVEL	IP65	IP65	IP65
Cable	0.2m H05RN-F3G 1.0mm2 rubber cable	0.2m H05RN-F3G 1.0mm2 rubber cable	0.2m H05RN-F3G 1.0mm2 rubber cable
Warranty	2 years	2 years	2 years

ITEM NO. HN-TTSD-01



TTSD-01-D





TTSD-01-A



TTSD-01-B




TTSD-01-C

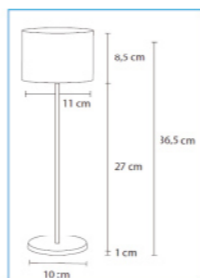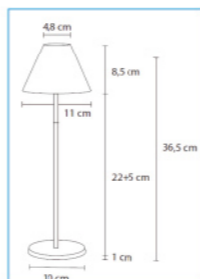


Touch type stepless dimming table lamp

Item.No	TTSD-01-A	TTSD-01-B	TTSD-01-C	TTSD-01-D
Watt	3.5W	3.5W	3.5W	3.5W
Material	lampshade:aluminium+PMMA lamp-post:iron lampholder:iron	lampshade:aluminium+PMMA lamp-post:iron lampholder:iron	lampshade:aluminium+PMMA lamp-post:iron lampholder:iron	lampshade:aluminium+PMMA lamp-post:iron lampholder:iron
Voltage	DC 5V/1A	DC 5V/1A	DC 5V/1A	DC 5V/1A
lumen	260lm	260lm	260lm	260lm
CCT	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K	3000K/4000K/6000K
battery	3600MA (2*1800MA)	3600MA (2*1800MA)	3600MA (2*1800MA)	3600MA (2*1800MA)
Switch	Touch	Touch	Touch	Touch
USB cable	0.8m	0.8m	0.8m	0.8m
RA	Ra90	Ra90	Ra90	Ra90
Dimmable	stepless dimming	stepless dimming	stepless dimming	stepless dimming
SIZE:D*L	110*365mm	110*380mm	110*365mm	110*365mm

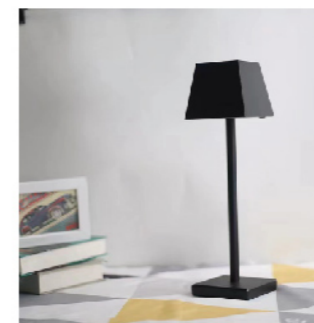

ITEM NO.HR2156

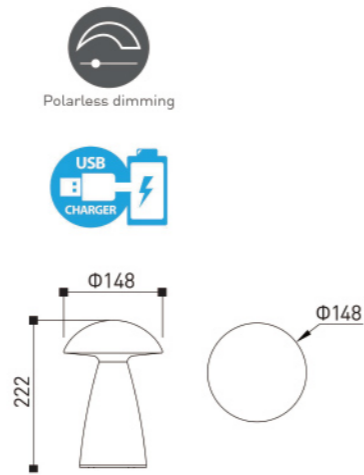

-Product Description

- CCT:2700K-6500K
- Input:DC 3.7V 4400mAh LI-ion
- Charging time:3-4h
- Colour:White
- Touch 1 = 60% lumen -8h light
- Touch 2 = 100% lumen -4h light
- Touch 3 = 20% lumen -14h light
- Touch 4 = On/Off

Model	HR2156
Wattage	LED 3.5W
Lumen	250lm
IP	54
Materials	PC+ABS
Dimension(mm)	148x148x222





-- LED TABLE LIGHT



T905-150 6W
T905-200 10W



ITEM NO.T905

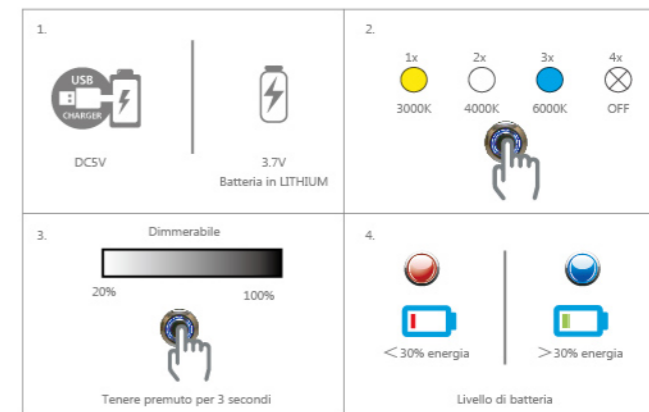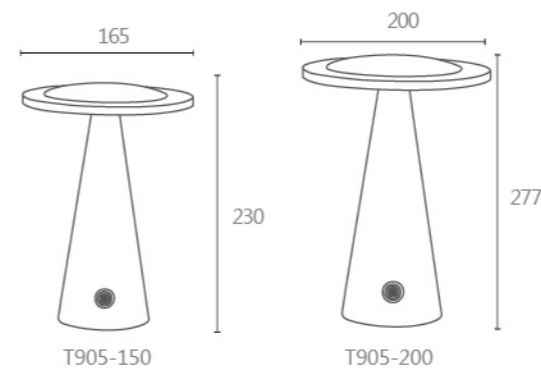

Codice	T905-150	T905-200
USB Charger Voltage	DC 5V/1A	DC 5V/2A
Power	6W	10W
Li-Battery Capacity	2200mAH	3000mAH
Max Power in Emergenza	3W	6W
Tempo in carico	6~8 ore	6~8 ore
Tempo in funzione	4~6 ore	4~6 ore
Dimensioni	φ165*230mm	φ200*277mm
Materiale	Ferro+PMMA	Ferro+PMMA

HANNORLUX®
— 汉宁照明 —



Colour Wheel

Hundreds of ideas for real colourful life

ITEM NO.RGB String Light

HANNORLUX®
— 汉宁照明 —

RGB String Light

Colour Wheel
Hundreds of ideas for real colourful life



SPECIFICATION

Codice	3C 20AWG RGBCW String Light	3C 20AWG RGBCW String Light
Length	7.3m	15m
Bulbs	12pcs	15pcs
Input Voltage	AC 110-240V	AC 110-240V
Output Voltage	DC12V/2A	DC12V/2A
Lamp Watt	0.3W	0.3W
Max Watt	24W	24W
Waterproof	IP 65	IP 65
Adapter Material	PC VO	PC VO
Working Time	10000 hours	10000 hours
Working Temperature	-20 to 40	-20 to 40
MOQ	1000 pcs	1000 pcs
Certificate	ETL FCC CE ROHS	ETL FCC CE ROHS

CE EAC FCC RoHS

HANNORLUX®
— 汉宁照明 —



Smart Life

Download on the
App Store

GET IT ON
Google Play

NOM

ITEM NO.HD2215 TUYA STUYA Smart Path Lights

Double-head Lighting



2700K Warm White Brightness:1-100%

16 Million Colors Brightness:1-100%



8 W



Scene +
Custom Mode



Light
Schedules





Music
Rhythm



Voice
Control

HANNORLUX®
— 汉宁照明 —

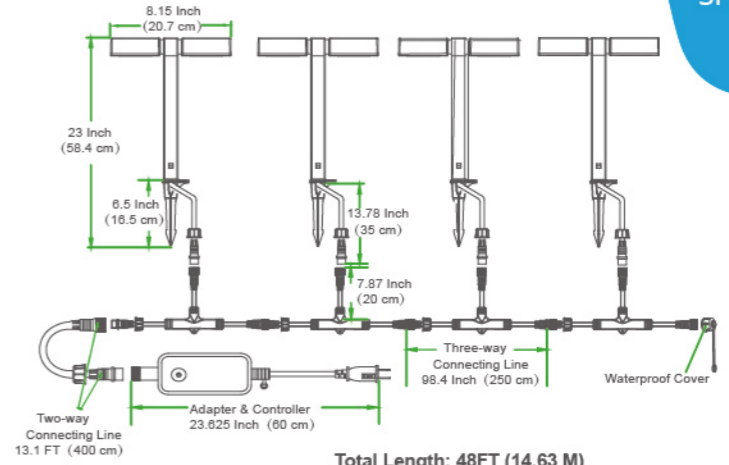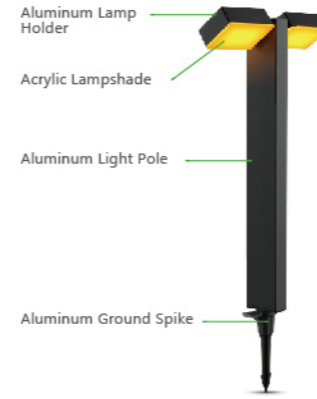

Model	HD2215 TUYA STUYA Smart Path Lights			
	1pcs pathway lights	2pcs pathway lights	3pcs pathway lights	4pcs pathway lights
Cable	5*20AWG	5*20AWG	5*20AWG	5*20AWG
Colour	RGBCW	RGBCW	RGBCW	RGBCW
Length	1pc power cacble 0.6M 1pc extension cable 4M 1pcs pathway lights 1pcs pathway light cable 2.5M	1pc power cacble 0.6M 1pc extension cable 4M 2pcs pathway lights 2pcs pathway light cable 2.5M	1pc power cacble 0.6M 1pc extension cable 4M 3pcs pathway lights 3pcs pathway light cable 2.5M	1pc power cacble 0.6M 1pc extension cable 4M 4pcs pathway lights 4pcs pathway light cable 2.5M
Material	Aluminum+PC	Aluminum+PC	Aluminum+PC	Aluminum+PC
Input Voltage	110-240V	110-240V	110-240V	110-240V
Output Voltage	12v3a	12v3a	12v3a	12v3a
Lamp Watt	8W per pathway light	8W per pathway light	8W per pathway light	8W per pathway light
Max Watt	36W	36W	36W	36W
Waterproof	IP65	IP65	IP65	IP65
Certificate	ETL	ETL	ETL	ETL

SPECIFICATION





NINGBO HANNORLUX TECHNOLOGY CO., LIMITED

Product Brochure

Pendant Light Series

HANNORLUX®
— 汉宁照明 —



HR23001
Iron+Wood
D=24cm
H=24cm

HR23003
Iron+Wood
L=60cm
D=24cm
H=24cm

HR23004
Iron+Wood
L=90cm
D=24cm
H=24cm

HANNORLUX®
— 汉宁照明 —

SPECIFICATION



HR23011
Iron
D=24cm
H=24cm

HR23014
Iron
L=90cm
D=24cm
H=24cm

REVIVAL
MODE



HR20359
Iron
D=22cm
H=20.5cm



HR20363
Iron
D=17cm
H=18cm



HR20658
Iron+Glass
D=28cm
H=33cm



HR20659
Iron+Glass
D=25cm
H=23cm



HR20167
Iron
L=20cm W=28cm
H=23.5cm



HR20362
Iron
D=13cm
H=22cm



HR20365
Iron
D=14.5cm
H=23cm



- 1.Cage is made of high grade spring, can be made into many shapes
- 2.Flat shape and small size when folded, small space occupation, and uses small package and much less transportation cost
- 3.Simple structure, easy carrying & DIY installation



HR22562
Iron
D=15.5cm



HR22566
Iron
D=14.5cm



HR22563
Iron
D=11.5cm



HR22561
Iron
D=15.5cm



HR20713
Cement
D=8.8cm
H=19.5cm



HR20711
Cement
D=8.2cm
H=18cm



HR20715
Cement
D=11.2cm
H=17cm



HR20714
Cement
D=8.3cm
H=18cm



Indoor Luminaire Pendent (E26/E27)

Popular Steel Bulb Holders with external threading and ring can be used in combination with lampshades and wireguards to create endless components configurations.

DESCRIPTION	DATA
Max.Wattage	60W
Energy Consumption	60.3Wh
Cable Length	1M/1.5M
Portalampara Base	E26/E27
Voltage	127V/220V
Frequency	50/60 Hz
Lampshade material	Marble/Cement

HANNORLUX®
— 汉宁照明 —

HR20803
Metal + Glass
D=25cm
H=27cm



HR20806
Metal + Glass
D=18cm
H=25.8cm



HR20807
Metal + Glass
D=18cm
H=25.8cm



HR20804
Metal + Glass
D=25cm
H=27cm



HR20808
Metal + Glass
D=18cm
H=25.8cm



HR20805
Metal + Glass
D=25cm
H=27cm



HANNORLUX®
— 汉宁照明 —

HR20809
Metal + Glass
D=24.5cm
H=26cm



HR20810
Metal + Glass
D=24.5cm
H=26cm





HR20811
Metal + Glass
D=24.5cm
H=26cm



SPECIFICATION




HR22576
Iron
D=30.5cm

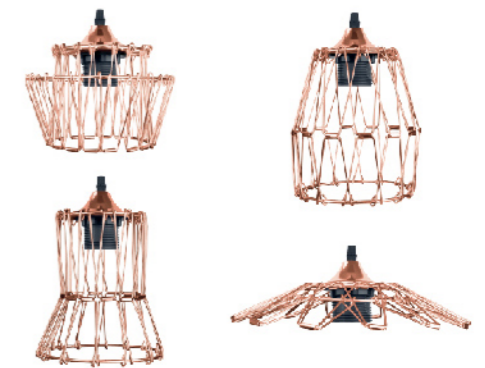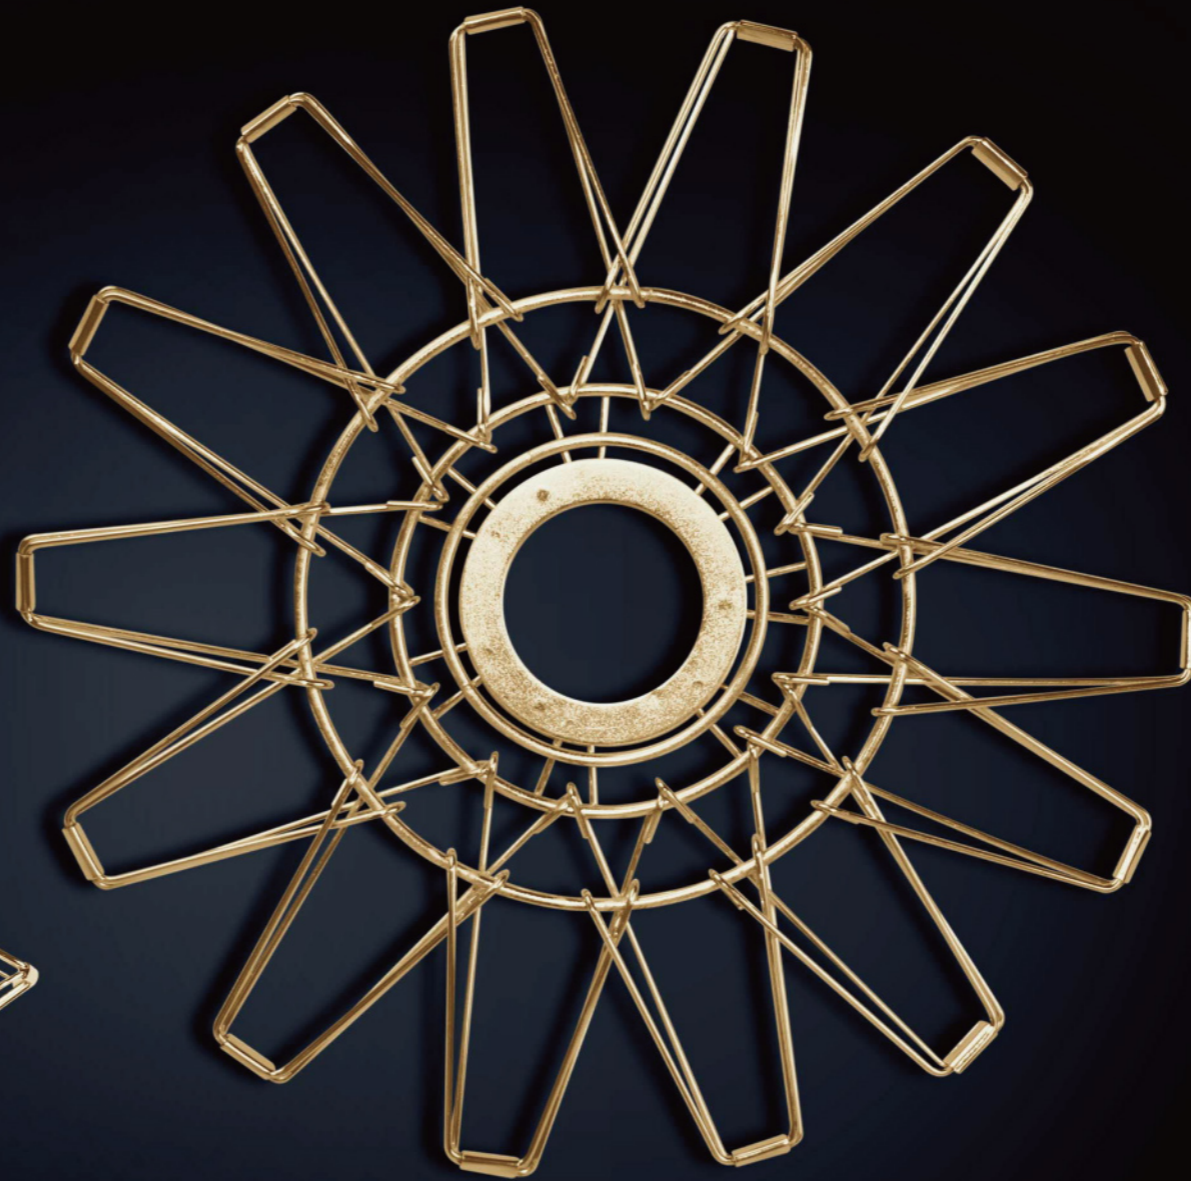


HR22572
Iron
D=24.5cm




HR22577
Iron
D=37cm

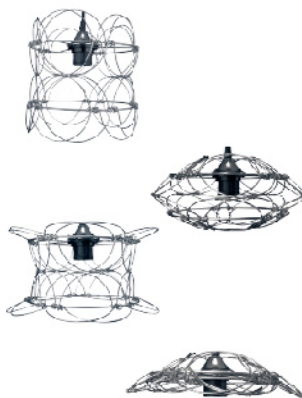

HR22581
Iron
D=21cm

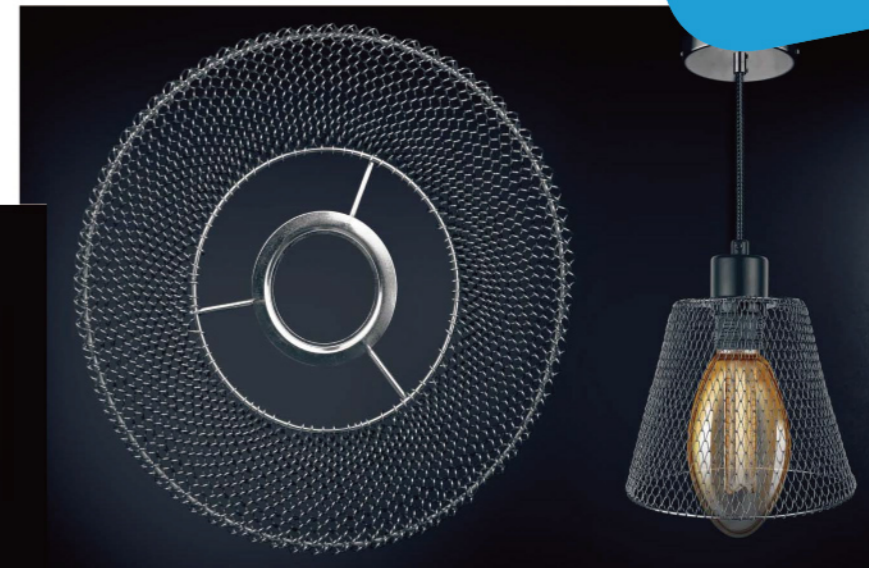

HR22586
Iron
D=20.5cm

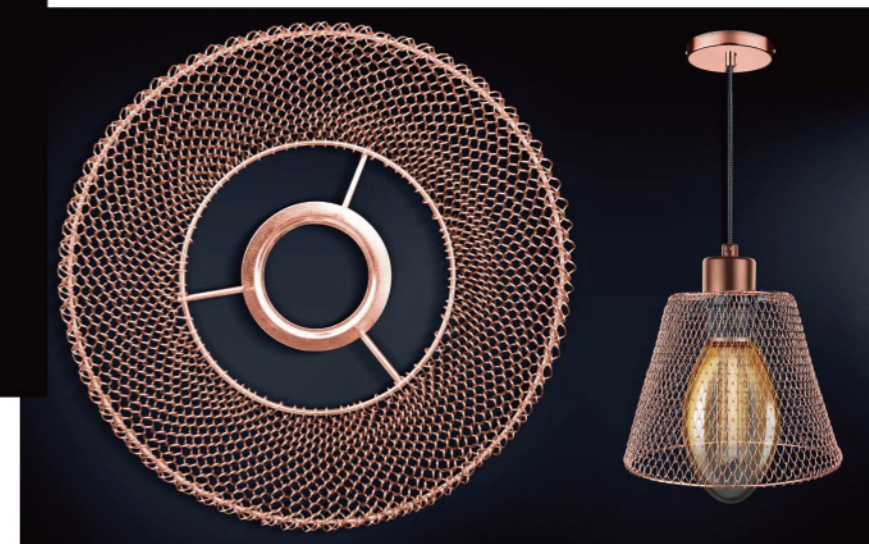

HR22587
Iron
D=20.5cm






Solar Lamp



HANNORLUX®
— 汉宁照明 —
NINGBO HANNORLUX TECHNOLOGY CO., LIMITED

Solar Lamp

SPECIFICATION



Model	HR2145
Wattage	LED 2.8W
Lumen	220lm
IP	54
Materials	Aluminum+PC
Dimension(mm)	150 x 150x 152

ITEM NO.HN1011/HN1012



HN1011
D:88mm
H:125mm



HN1012
D:88mm
H:125mm

-Product Description

2Modes:

A: People come,light on,people leave,light off;

B: People come, high lumen,People leave low lumen

Model	HN1011	HN1012
Solar panel	5.5V/0.8W polycrystal	5.5V/0.8W polycrystal
Material	plstic	plstic
Working model	night sensor/PIR motion sensor	night sensor/PIR motion sensor
Charging time	6-8H	6-8H
Work time	6-8H	6-8H
IP	IP44	IP44
Mode	Dim Mode	Dim Mode
Light source	1pcs LED	1pcs LED
Product Size	88*125mm	88*125mm
Battery type	1pc*3.7V 1200mAh lithium battery	1pc*3.7V 1200mAh lithium battery



ITEM NO.HN6202/HN6203



HN6203
L:145mm
W:145mm
H:182mm



HN6202
L:135mm
W:135mm
H:182mm

-Product Description

HN6202-With solar panel
HN6203-Without solar

Model	HN6202	HN6203
Solar panel	5.5V/1W monocrystal	5.5V/1W monocrystal
Material	aluminum	aluminum
Working model	10%/40%/100% light	10%/40%/100% light
Charging time	7-8H	7-8H
Work time	10H	10H
IP	IP44	IP44
Mode	ON/OFF	ON/OFF
Light source	18pcs LED	18pcs +E9J9LED
Product Size	135*135*182mm	145*145*182mm
Battery type	4pc*3.7V 1200mAh lithium battery	4pc*3.7V 1200mAh lithium battery



ITEM NO. HN1516/HN1518/HN2206/HN2207



HN1516
L:160mm
W:170mm
H:185mm



HN1518
L:133mm
W:133mm
H:500mm



HN2206



HN2207



-Product Description

3 Modes can be used:

Mode A: The light always on at weak light when it's dark;

Mode B: The light always on at weak light; it will last 25s at middle lumen during the motion detected, and return back to weak light if no motion detected in 25s;

Mode C: The light always on about high lumen, and will off if no motion detected in 25seconds

Model	HN1516	HN1518	HN2206	HN2207
Solar panel	5.5V/1W monocrystal	5.5V/1W monocrystal	5.5V/1W monocrystal	5.5V/1W monocrystal
Material	aluminum	aluminum	aluminum	aluminum
Working model	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode
Detection Angle	110°	110°	110°	110°
Detection Range	10m	10m	10m	10m
Charging time	6-8H	6-8H	6-8H	6-8H
Work time	10H	10H	10H	10H
IP	IP44	IP44	IP44	IP44
Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode
Light source	28pcs LED	28pcs LED	28pcs LED	28pcs LED
Product Size	160*170*185mm	133*133*500mm	/	/
Battery type	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery



ITEM NO.HN1115/HN1116/HN1117/HN1118



HN1115



HN1116



HN1117



HN1118



-Product Description

3 Modes can be used:

Mode A: The light always on at weak light when it's dark;

Mode B: The light always on at weak light;it will last 25s at middle lumen during the motion detected,and return back to weak light if no motion detected in 25s;

Mode C: The light always on about high lumen,and will off if no motion detected in 25seconds

Model	HN1115	HN1116	HN1117	HN1118
Solar panel	5.5V/1W monocrystal	5.5V/1W monocrystal	5.5V/1W monocrystal	5.5V/1W monocrystal
Material	aluminum	aluminum	aluminum	aluminum
Working model	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode
Charging time	7-8H	7-8H	7-8H	7-8H
Work time	10H	10H	10H	10H
IP	IP44	IP44	IP44	IP44
Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode
Light source	18pcs LED	25pcs LED	26pcs LED	28pcs LED
Battery type	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 2200mAh lithium battery



ITEM NO.HN1521/HN1522/HN1072/HN1073



HN1521
L:188mm
W:225mm
H:100mm



HN1072
L:145mm
W:110mm
H:100mm



HN1522
L:175mm
W:145mm
H:75mm

-Product Description

3 Modes can be used:

Mode A: The light always on at weak light when it's dark;

Mode B: The light always on at weak light;it will last 25s at middle lumen during the motion detected,and return back to weak light if no motion detected in 25s;

Mode C: The light always on about high lumen,and will off if no motion detected in 25seconds

Model	HN1521	HN1522	HN1072	HN1073
Solar panel	5.5V/1W monocrystal	5.5V/1W monocrystal	2V/0.1W polycrystal	2V/0.1W polycrystal
Material	aluminum	aluminum	plsatic	plsatic
Working model	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor/Dim Mode
Detection Angle	110°	110°	110°	110°
Detection Range	10m	10m	3-5m	3-5m
Charging time	6-8H	6-8H	6-8H	6-8H
Work time	10H	10H	6-8H	6-8H
IP	IP44	IP44	IP44	IP44
Mode	Sensor/Dim Mode	Sensor/Dim Mode	Sensor	Sensor
Light source	28pcs LED	25pcs LED	21pcs LED	21pcs LED
Product Size	188*225*100mm	175*145*75mm	145*110*100mm	160*128*600mm
Battery type	1pc*3.7V 2200mAh lithium battery	1pc*3.7V 1800mAh lithium battery	1pc*1.2V 600mAh NI-MH	1pc*1.2V 600mAh NI-MH



ITEM NO.HN-2030/HN2025/HN2027



HN1521

HN2030



HN2025



HN2027

Model	HN2030	HN2025/2027
Battery type	2400mAh	600mAh
Light source	10pcs LED	8*10pcs LED

